
## Atlas Copco forward and reversible plates

## More compaction efficiency, longer lasting



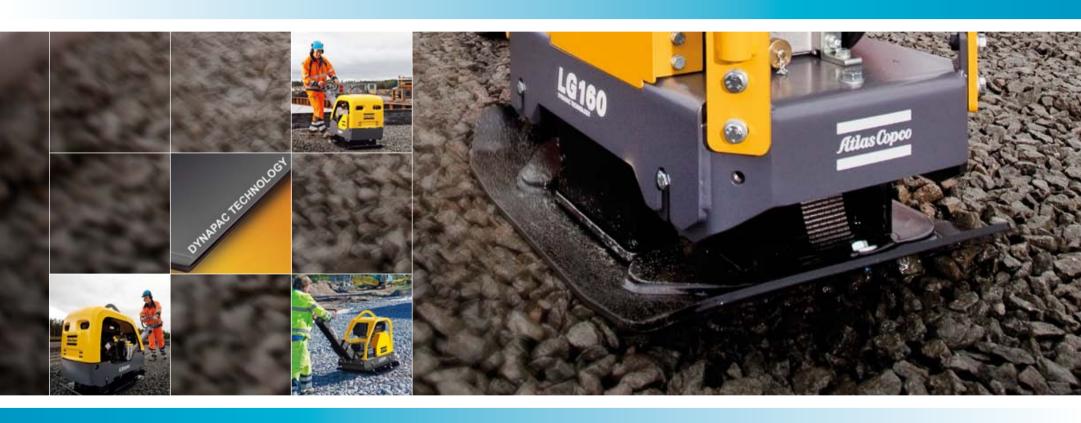

## FORWARD & REVERSIBLE PLATES

Atlas Copco offers a full range of forward and reversible plates in weight classes from 155 to 820 kg, featuring plate widths from 330 to 750 mm. Our reversible plates are specially designed to compact medium to deep layers

of granular soils in confined areas, such as trenches, parking lots and foundations. With a block paving kit they are also suitable for block paving applications.







|                                   |                        | LG160        | LG160        | LG160        | LG160        | LG200        | LG200        | LG200<br>electric start | LG300        | LG300        | LG300        | LG300        | LG300<br>electric start | <b>LG300</b> electric start |
|-----------------------------------|------------------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------------------|--------------|--------------|--------------|--------------|-------------------------|-----------------------------|
| Operating mass                    | kg                     | 155          | 161          | 169          | 175          | 217          | 231          | 247                     | 265          | 270          | 282          | 287          | 302                     | 307                         |
| Centrifugal force                 | kN                     | 28           |              |              |              |              | 36           |                         | 40           |              |              |              |                         |                             |
| Speed                             | m/min                  | 22           |              |              |              |              | 25           |                         | 25           | 25           | 35           | 25           | 25                      | 25                          |
| Plate width                       | mm                     | 330          | 450          | 330          | 450          |              | 500          |                         | 500          | 600          | 500          | 600          | 500                     | 600                         |
| Amplitude                         | mm                     | 1.4          |              |              |              | 1.9          |              |                         | 1.7          |              |              |              |                         |                             |
| Frequency                         | Hz                     | 80           |              |              |              | 65           |              |                         | 68           |              |              |              |                         |                             |
| Engine brand                      |                        | Honda        | Honda        | Hatz         | Hatz         | Honda        | Hatz         | Hatz                    | Honda        | Honda        | Hatz         | Hatz         | Hatz                    | Hatz                        |
| Rated power                       | kW                     | 4.1          | 4.1          | 2.8          | 2.8          | 4.8          | 3.1          | 3.1                     | 5.8          | 5.8          | 4.2          | 4.2          | 4.2                     | 4.2                         |
| Sound power, guaranteed           | L <sub>wA</sub> dB(A)  | 108          |              |              |              | 105          |              |                         | 108          |              |              |              |                         |                             |
| Sound pressure at operators ear   | (L <sub>pA</sub> dB(A) | 92           |              |              |              | 90           |              |                         | 92           | 92           | 94           | 94           | 94                      | 94                          |
| H/A vibrations                    | m/s²                   | 1.5          | 1.5          | 2.4          | 2.4          | 3.5          | 3.5          | 3.5                     | 2.4          | 2.4          | 1.7          | 1.7          | 1.7                     | 1.7                         |
| Part number                       |                        | 3382 0000 15 | 3382 0000 14 | 3382 0000 13 | 3382 0000 12 | 3382 0000 65 | 3382 0000 66 | 3382 0000 67            | 3382 0000 39 | 3382 0000 41 | 3382 0000 37 | 3382 0000 40 | 3382 0000 38            | 3382 0000 36                |
| Safety and Operating Instructions |                        | 9800 110301  |              |              |              | 9800 110501  |              |                         | 9800 110701  |              |              |              |                         |                             |

Important: Full dimension details are available in the product's Safety and Operating Instructions (see table above for ID-number). Available at www.acprintshop.com.