

Model 530LRT

ROUGH TERRAIN SCISSOR LIFT



ENVIRONMENTALLY FRIENDLY

- Variable engine speed control for improved fuel efficiency reducing operating cost.

POWER AND PERFORMANCE


- Standard oscillating axle offering superior terrainability when traveling uneven surfaces.

MORE ACCESS

- An optional MegaDeck increasing the operator work area to 7.2 m
- Spacious deck with standard 2.28 m dual deck extension providing more working space for people and materials.

GREATER STRENGTH

- Stronger, thicker steel provides added stability which enhances operator confidence while working on the platform.

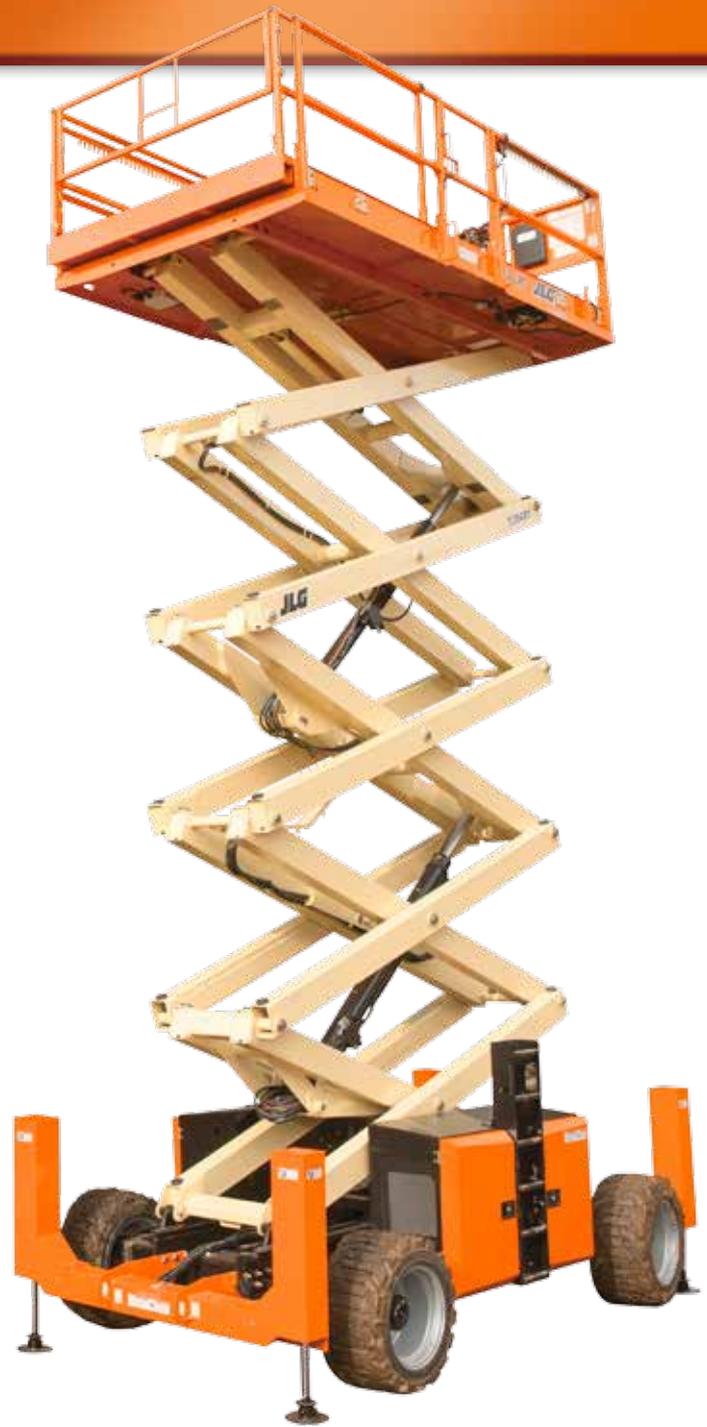

Standard Features

- 4-Wheel Drive
- Automatic Transmission
- Two speed drive select
- Proportional Drive/Lift Up/Lift Down
- Oscillating Axle
- 2.28 m dual deck extension
- AC cable to Platform
- 1.91 m x 4.06 m All Steel Platform
- Adjustable, Removable Platform Control Station
- On-Board Diagnostics
- Low fuel indicator in platform
- Fold-Down Handrails
- Horn
- Tilt Light and Alarm
- Manual Descent
- All Motion Alarm
- Swing out engine module
- Leveling Jacks
- Self-Closing Entry Gates

Standard Specifications

Engine	
Make and Model	Kubota D1305 21.7 kW
• Diesel (Water Cooled)	83 L
• Fuel Tank Capacity	
Tyres	
• Standard	12 x 16.5 Foam-Filled
• Optional	395/45 D20 low profile foam filled 12 x 16.5 foam filled non marking
Brakes	
• 4 Wheel	Spring Applied
Hydraulic Reservoir	
• Capacity	129 L

Accessories & Options

- 1.91 m x 4.87 m Megadeck
- Single Extension Decks
- Platform Worklights
- 13mm (1/2 in) Air Line to Platform
- Flashing Amber Beacon
- 7,500 Watt Generator
- 4,000 Watt Generator
- Night Bright® Package
- PipeRack Accessory
- Euro plugs and sockets
- Platform workstation

Note: Some options may increase lead time, and some option combinations may not be available.

Model 530LRT

ROUGH TERRAIN SCISSOR LIFT

Performance


- Working Height—Elevated 18.15 m
- Platform Capacity (incl Dual extension) 680 kg
- Capacity on Platform Extension 230 kg
- Dimensions:
 - Platform Height Elevated 16.15 m
 - A. Platform Height Lowered 2.02 m
 - B. Platform Railing Height 1.13 m
 - C. Platform Size 1.91 m x 4.06 m
 - D. Platform Extension 1.14 m
 - E. Overall Length 4.88 m
 - F. Overall Width 2.31 m
 - G. Wheelbase 2.97 m
 - H. Ground Clearance 32 cm
- Lift/Lower Time 65/60 seconds
- Maximum Drive Height 9.75 m
- Weight ^{1/2} 7,995 kg
- Ground Bearing Pressure² 6.7 kg/cm²
- Drive Speed 5.6 km/h
- Gradeability 40%
- Turning Radius (Inside) 4.04 m
- Turning Radius (Outside) 6.02 m

¹ Certain options or country standards may increase weight and/or dimensions

² With Standard tires



Dimensions

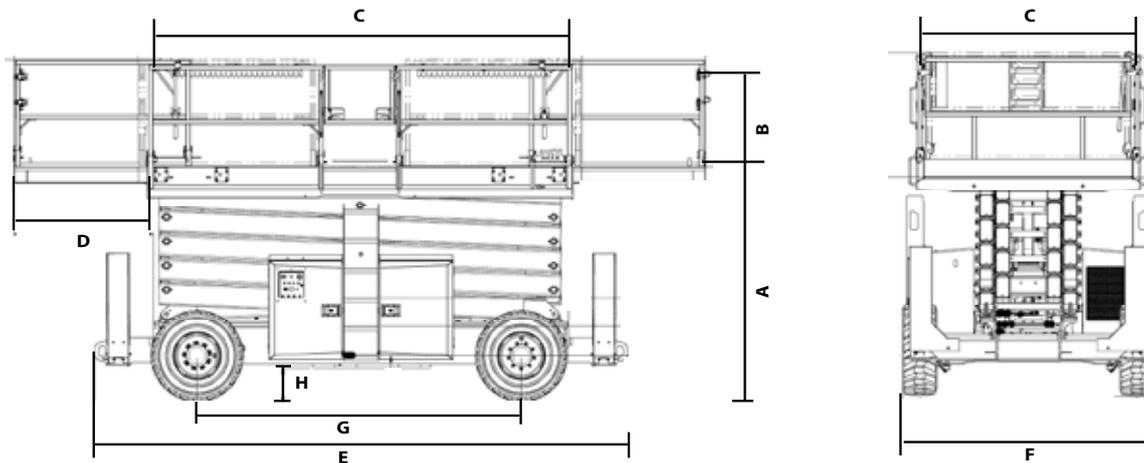

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.



JLG EMEA BV

Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands
Tel: +31 (0) 23 565 5665
Fax: +31 (0) 23 557 3750
www.jlg.com

An Oshkosh Corporation Company

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.